



# TZ Series COLUMN SPEAKERS





***Compact design for every architectural structure.  
Experience superb sound quality from every angle &  
non-echo ambience with TOA technology.***

## TZ Column Speaker System

When a box speaker is used in a large enclosed area, eg. auditorium, religious venues, there will be minimal losses in the strength of sound transmission. This results in sound losses to the target audience when sound reflects off a ceiling, it causes echoes and some delay. TOA's TZ series column speaker solves the echoing problem with high effectiveness. It ensures you enjoy a clear crisp sound & speech environment.

## Features

- Speaker units are arranged in a linear fashion, enhancing directivity using interference between sound waves from each speaker.
- Column speakers are an effective tool against reverberation.
- Allows clear, good-quality sound amplification with minimal reverberation and feedback.
- The attached fitting allows the speaker to be turned freely, making it easy to establish an ideal layout and sound field.

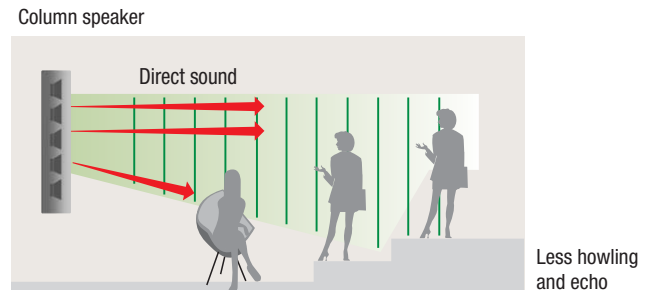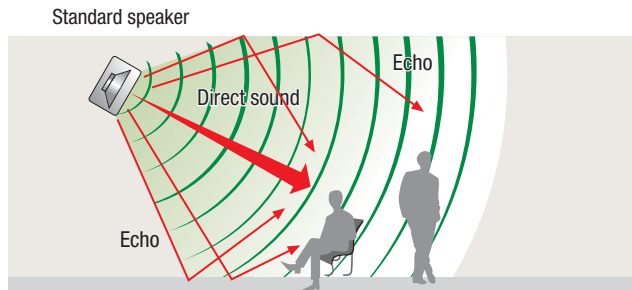

## SPECIFICATION

Model No.	TZ-206B AS	TZ-206W AS
Enclosure	Sealed type	
Rated Input	20W	
Rated Impedance	100 V line: 500Ω (20W), 1kΩ (10W), 2kΩ (5W), 4kΩ (2.5W) 70 V line: 500Ω (10W), 1kΩ (5W), 2kΩ (2.5W), 4kΩ (1.3W)	
Sensitivity	90 dB (1W, 1m)	
Frequency Response	150 – 16,000Hz	
Speaker Component	10 cm cone-type x 2	
Input Terminal	Push-in terminal	
Finish	HIPS, black	HIPS, white
Dimensions	135 (w) x 250 (h) x 128 (d) mm	
Weight (Unit only)	1.9 kg	

Model No.	TZ-406B AS	TZ-406W AS
Enclosure	Sealed type	
Rated Input	40W	
Rated Impedance	100 V line: 250Ω (40W), 500Ω (20W), 1kΩ (10W), 2kΩ (5W) 70 V line: 250Ω (20W), 500Ω (10W), 1kΩ (5W), 2kΩ (2.5W)	
Sensitivity	93 dB (1W, 1m)	
Frequency Response	150 – 16,000Hz	
Speaker Component	10 cm cone-type x 4	
Input Terminal	Push-in terminal	
Finish	HIPS, black	HIPS, white
Dimensions	135 (w) x 498 (h) x 128 (d) mm	
Weight (Unit only)	3.5 kg	

Model No.	TZ-606B AS	TZ-606W AS
Enclosure	Sealed type	
Rated Input	60W	
Rated Impedance	100 V line: 170Ω (60W), 330Ω (30W), 670Ω (15W), 1.3kΩ (7.5W) 70 V line: 170Ω (30W), 330Ω (15W), 670Ω (7.5W), 1.3kΩ (3.8W)	
Sensitivity	95 dB (1W, 1m)	
Frequency Response	150 – 16,000Hz	
Speaker Component	10 cm cone-type x 6	
Input Terminal	Push-in terminal	
Finish	HIPS, black	HIPS, white
Dimensions	135 (w) x 746 (h) x 128 (d) mm	
Weight (Unit only)	5.5 kg	



Human society with  
Sound & Communication

TOA Electronics Pte Ltd  
www.toa.com.sg

Specifications are subject to change without notice.  
Printed in Singapore (010) 833-22-001-11