


SPECIFICATIONS

Rated Input	20 W (Max.30 W)
Rated Impedance	500 Ω (20 W/100 V Line) : BLK 1 kΩ (10 W/100 V Line) : BLU COM : WHT
Sound Pressure Level	93 dB (1 m, 1 W)
Frequency Response	150 ~ 10,000 Hz
Speaker Component	12 cm Dynamic cone-type speaker 4 pcs.
Installation A Place	In door or Out door
Protection Of Ingress Of Water	Splash proof (On handling precaution)
Finish	Enclosure : Extruded aluminum, Silver gray Grille : Punched aluminum net, Black Mounting bracket : Steel plate, Silver gray
Dimensions (W×H×D)	167(6.57") × 580(22.83") × 141(5.55") mm
Weight	Speaker : 5.1 kg (11.24 lb.) With mounting bracket : 5.7 kg (12.57 lb.)

※Handling Precaution

A drain hole is provided at the speaker bottom, i.e. the side a speaker cable is connected to.
Always install the speaker with the cable side down.

APPEARANCE

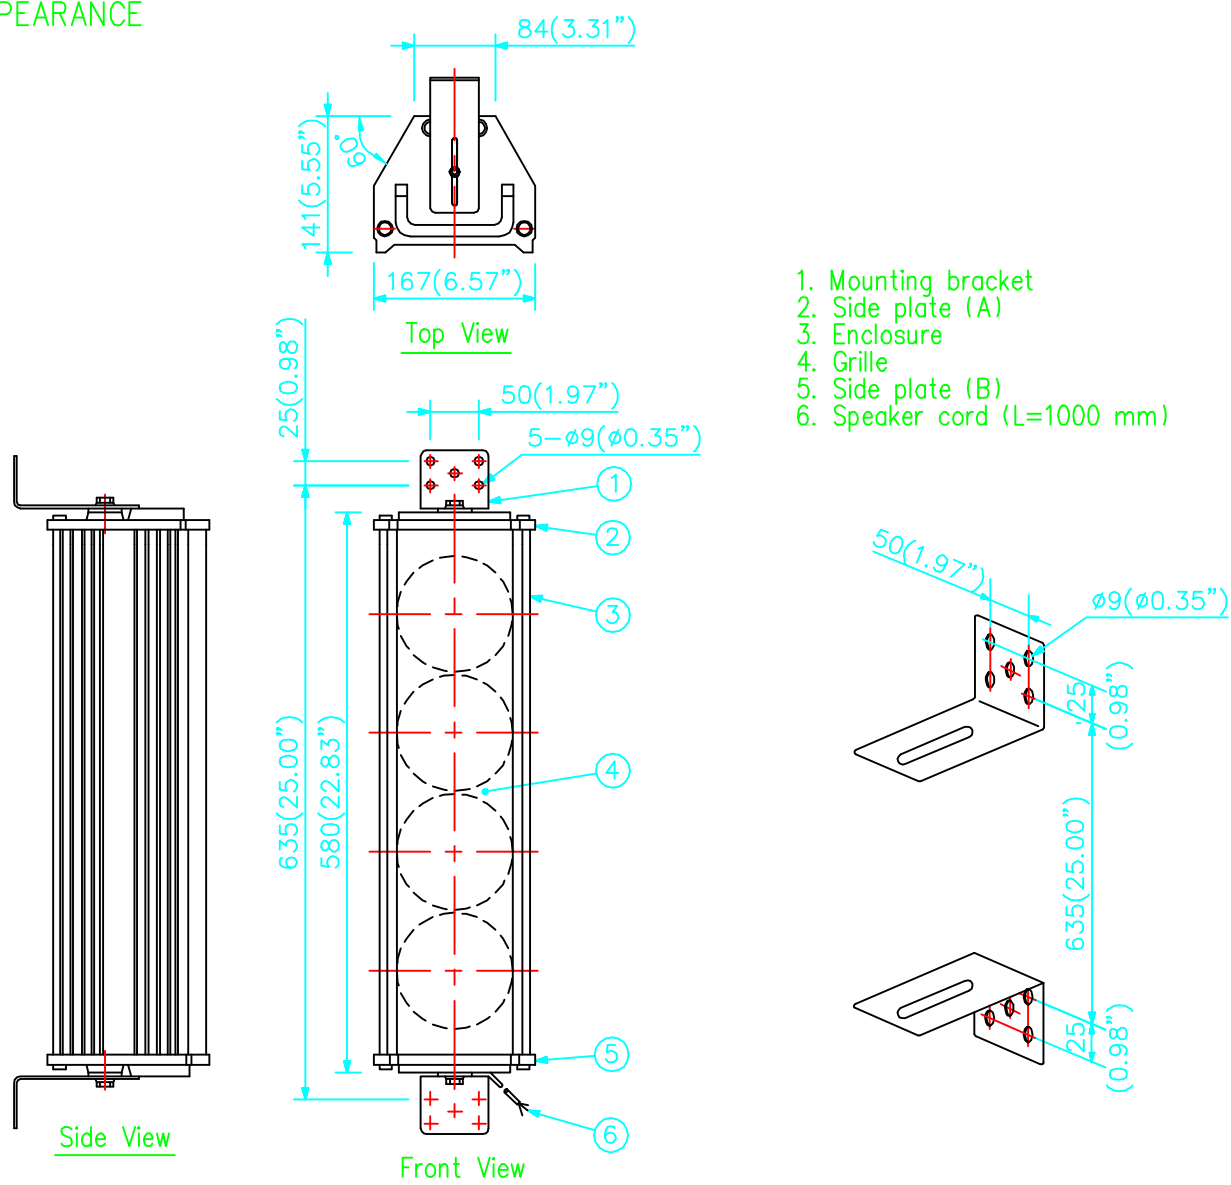

UNIT:mm SCALE:1/8