

DCS-880C Digital Chairman Discussion Unit



DCS-880 series is a new digital discussion unit, which includes a chairman unit (DCS-880C) and delegate unit (DCS-880D). Chairman unit has priority of the whole meeting and can terminate or discontinue other delegate units who is speaking.

DCS-880 Series supports multiple meeting for :

- Corporate meeting Rooms.
- Government meeting room & City Council Meeting.
- Education institutions.
- Courtrooms.
- Non-profit organizations.

Feature

- Digital audio for good sound quality.
- Built-in hi-fi loudspeaker and pluggable microphone.
- Removeable gooseneck microphone with light ring indicator on microphone stem, light up red when microphone turn on.
- High sensitivity microphone.
- Good ability for resistance to Mobile interference.
- Chairman priority key ; could shut all the delegate unit.
- Chairman approve key ; approve the speaking request from delegate unit.
- The chairman unit can be placed in any position in loop.
- The chairman unit quantity is unrestricted in the loop.
- The chairman unit is unrestricted by the limiting function.
- Speaking button and indicator lamp that can show and control the state of speech.
- Two groups of 3.5mm stereo sound output socket; can be used as speech sound input and earphone connection.
- Rotary volume control for adjusting built-in loudspeaker or headphone volume (when headphone connect).
- Daisy-Chain connection.
- Connecting cable 2.1m, 8P core line, convenient installation can increase efficiency.
- The power for units is supplied by the master controller.
- Support automatic video-camera tracking function.
- Reduce sound impact and wind shield.
- Metal microphone shell bottom.



- Chairman priority button, When pressed the chairman priority button causes all currently active delegate microphones to be permanently muted.
- Chairman approve button, When pressed the approve button, the microphone of the requesting DCS-880D will be activated.
- Digital audio for good sound quality.
- Built-in loudspeaker and pluggable microphone.
- Good ability for resistance to Mobile interference.
- Support automatic video-camera tracking function.
- Reduce sound impact and wind shield.
- Metal microphone shell bottom.
- Light ring indicator on microphone stem, lights up red when microphone is on.

Certifications : CE and RoHS

The DCS-880C conforms to standard

- IEC 62321
- EN 55013 , EN 55020 , EN 60065 , EN 61000

Specifications

| | |
|-----------------------|-----------------------|
| Power Supply | DC 9V by Control unit |
| Power Consumption | 80mA |
| Interface Type | 8P-DIN |
| Earphone Output | 3.5mm stereo jack |
| Installation | Desktop |
| Input Impedance | 1 K Ω |
| Connection Mode | Daisy-Chain |
| Crosstalk Attenuation | >68 dB |
| Speaker Power | 2W |
| Microphone Type | Condenser |
| Polar pattern | Ultra Cardioid |
| Frequency response | 30Hz-18kHz |
| Signal-to-Noise Ratio | 68dB(A-Wieght) |
| Sensitivity | -45 dBV/Pa |
| Length of Microphone | 480mm |
| Color | Black |
| Dimensions | W160xH65xD140 mm |
| Weight | 1Kg |

DCS-880C Digital Chairman Discussion Unit

Diagram Solution DCS-880MD Control Unit

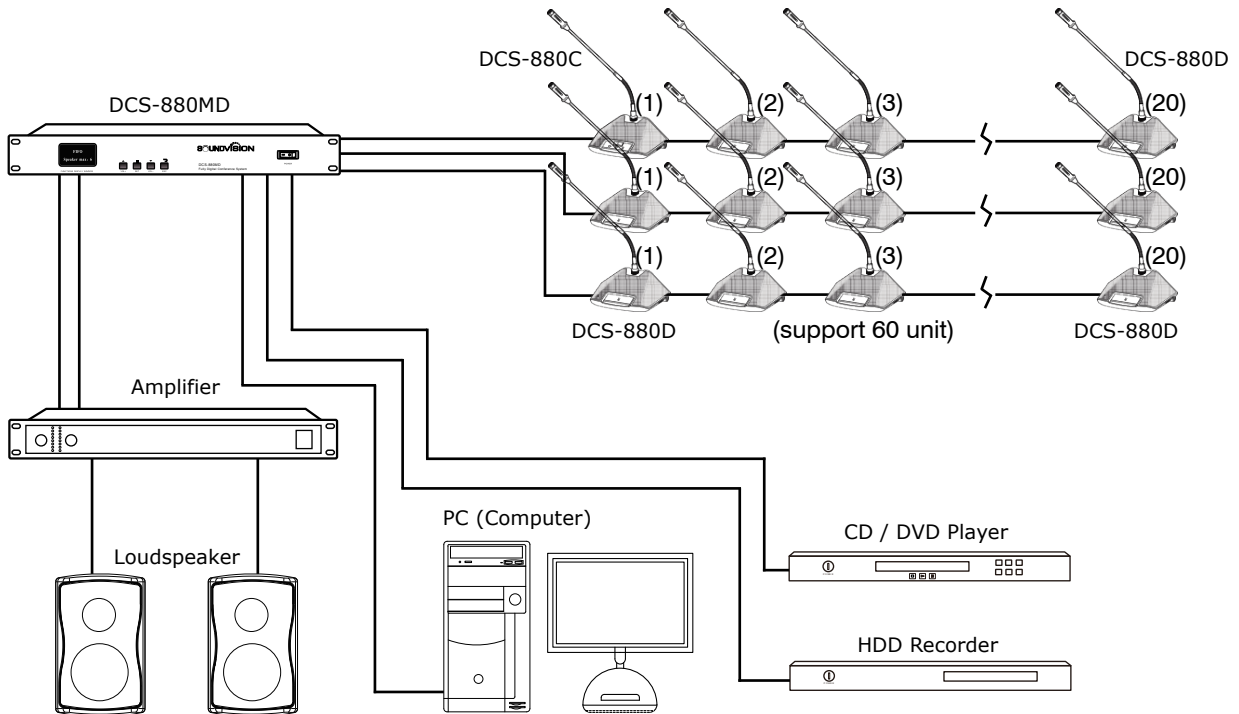


Diagram Solution DCS-880MCD Control Unit

