

# SVS-62T 6.5-Inch Two-way Surface-Mount Speaker



- Two-Way Full-range Loudspeaker.
- All-weather versatility IP44.
- High-quality sound.
- High sensitivity.
- 6.5-inch LF transducers Waterproof Paper Cone.
- 1-inch HF Transducer Silk dome.
- Transformer Taps 100V.
- Power Handling 120W.
- Frequency Response 50 - 20000 Hz.
- Coverage H 45° x V 45°.
- Available in black and white.

The **SVS-62T** is a new two-way surface-mount speaker ideal for indoor and outdoor applications requiring high-quality sound. Model SVS-62T designed for a wide range of commercial audio applications including retail shops, hotels, shopping malls, restaurants, conference-rooms, bars and health clubs. Model SVS-62T are available in black or white, Transformer Taps 100 V : 32 W, 16 W, 8W, 4W available for constant voltage systems.

## SVS-62T supports applications multiple :

- Meeting Room.
- Conference Room.
- Training Rooms.
- Hotels.
- Health clubs.
- Retail shops.
- Shopping malls & Plaza.
- Restaurant & Bar.

## Feature

- Two-Way Full-range Loudspeaker.
- Elegant design.
- High-quality sound.
- Indoor and outdoor applications.
- All-weather versatility IP44.
- High sensitivity.
- Transformer Taps 100V.
- 6.5-inch LF transducers Waterproof Paper Cone.
- 1-inch HF Transducer Silk dome.
- Power Handling 120W.
- Frequency Response 50 - 20000 Hz.
- Coverage H 45° x V 45°.
- Available in black and white.

## Specifications

All-weather versatility	IP44
Color	Black, White
Input Connections	Binding posts
Speaker Type	Full-range, Mid-High, Two-Way
Transformer Taps	100 V: 32 W, 16 W, 8W, 4W, 8 Ω Bypass
Frequency Response	50 - 20000 Hz
Sensitivity 1 W/1 m	90 dB
Max. SPL/1m (calc)	94 dB
Coverage (Nominal -6 dB) H	± 45°
Coverage (Nominal -6 dB) V	± 45°
System Power Handling	120W Max. / 60W Continuous
LF Transducer	6.5-inch Waterproof Paper Cone
HF Transducer	1-inch (Silk dome)
Nominal Impedance (Passive)	8 Ω
Indoor / Outdoor	Yes
Material	Engineering-Plastics (ABS)
Dimensions (H x W x D mm)	370 x 210 x 210 mm (without bracket)
Weight	8 Kg / pair , 4 Kg / Single

# SVS-62T 6.5-Inch Two-way Surface-Mount Speaker

## Order information

### Surface-mount speaker ( Black color )

6.5-Inch two-way surface-mount loudspeaker 120W, Transformer Taps 100V, indoor and outdoor applications, finished in black.

Order code : **SVS-62T-B**

### Surface-mount speaker ( White color )

6.5-Inch two-way surface-mount loudspeaker 120W, Transformer Taps 100V, indoor and outdoor applications, finished in white.

Order code : **SVS-62T-W**

## Parts included

### Component

SVS-62T-B Surface-mount Speaker or


SVS-62T-W Surface-mount Speaker

wall-mounting bracket

### Quantity

: 1 Pair

: 1 Pair

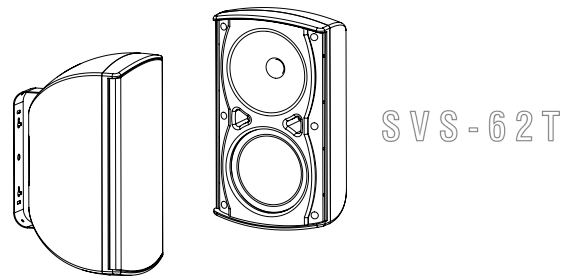

## Diagram

